




Rodless magnetic cylinder——RMS Series

Product series


Series name	Mounting type			Acting type	Bore size
	Basic	LB	FA		
RMS Series	●	●	●	Double acting	10 16 20 25 32 40
RMSP Series	●	●	●		16 20 32
RMSF Series	●	●	●		16 20 25 32 40
	●	●	●		
	●	●	●		
	●	●	●		
Page	370			372	

Installation and application


1. The maxi load to move must be less than the theoretical holding force.

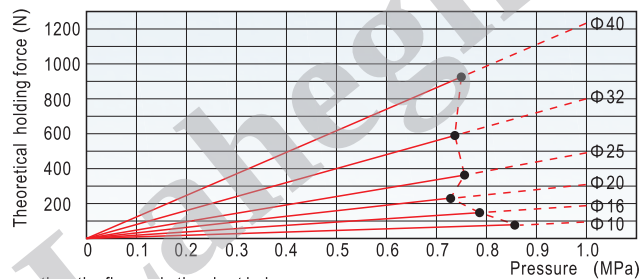


2. Horizontal mounting, the permissible radial load must be lower than the figures in the chart below.



Bore size	Max. load W
10	1.1kg
16	2.8kg
20	4.7kg
25	6.8kg
32	9.7kg
40	15.8kg





3. Vertical mounting, the allowable direction moment must be lower than the figures in the chart below, the dimensions of geometrical can be determined by the relation graph between loading and stroke.



Bore size	Allowable direction moment Mp
10	0.50kgf · m
16	1.20kgf · m
20	2.45kgf · m
25	3.92kgf · m
32	8.83kgf · m
40	13.7kgf · m

Note) Loading should be used with oriented device, example:

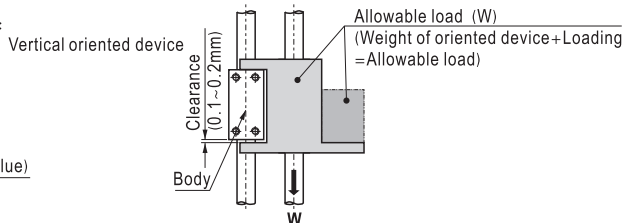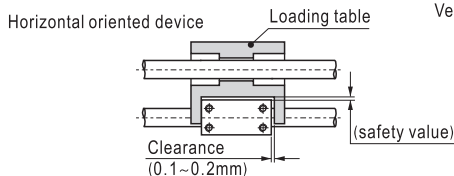

4. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of impurities into the cylinder.
5. The medium used by cylinder shall be filtered to 40 μm or below.
6. If the cylinder is dismantled and stored for a long time, pay attention to conduct anti-rust treatment to the surface. Anti-dust jam cap shall be added in air inlet and outlet ports.



RMS

Rodless magnetic cylinder

RMS Series



Specification

Series name	RMS		RMS, RMSF Series				RMSP Series		
Bore size (mm)	10	16	20	25	32	40	16	20	32
Acting type	Double acting								
Fluid	Air(to be filtered by 40 μ m filter element)								
Operating pressure	0.15~0.7MPa(23~100psi)(1.5~7bar)								
Proof pressure	1.0MPa(145psi)(10.0bar)								
Temperature ℃	-10~60								
Speed range mm/s	50~400								
Stroke tolerance mm	0~250 ^{+1.0} ₀ 251~1000 ^{+1.5} ₀ 1001~ ^{+2.0} ₀								
Cushion type	Variable cushion+Fixed cushion								
Port size ①	M5×0.8		1/8"		1/4"		M5×0.8		1/8"
Safe holding force N	60	140	200	360	550	850	140	200	550

① PT thread, G thread and NPT thread are available.

Stroke

Bore size (mm)	Standard stroke (mm)															Max. stroke(mm)
10	50	100	150	200	250	300										1000
16	50	100	150	200	250	300	350	400	450	500						1500
20	50	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000
25	50	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000
32	50	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000
40	50	100	150	200	250	300	350	400	450	500	600	700	750	800	900	1000

Note) Consult us for non-standard stroke.

Ordering code

RMS 20 × 200

Model

RMS: Rodless magnetic cylinder

Version

Blank: basic version
P: P size version
F: F size version

Bore size

Series name	Bore size
RMS	10
RMS, RMSF	16, 20, 25, 32, 40
RMSP	16, 20, 32

Thread type ②

Blank: PT
G: G
T: NPT

Mounting type

Blank: non bracket
LB: LB type
FA: FA type ①

Stroke


Refer to stroke table for details

Remark:

① RMSF40 series do not have FA mounting accessories.

② Blank on thread code means metric M thread. There is only metric thread for Φ 16. If G or NPT thread is needed, please comment.

Symbol



Product feature

1. This magnetic cylinder is basically a pneumatic rodless cylinder featuring a mobile piston fitted with annular magnets. The mobile carriage is also equipped with magnets to provide magnetic coupling (carriage/piston). The carriage slide freely along the main tube.
2. It is dust-proof as the isolation between the carriage and piston.
3. It is compact in space.
4. The non adjustable rubber bumpers and the adjustable pneumatic cushioning on both ends of the cylinder ensure the smooth action.




RMS

Rodless magnetic cylinder

RMS Series


Inner structure and material of major parts

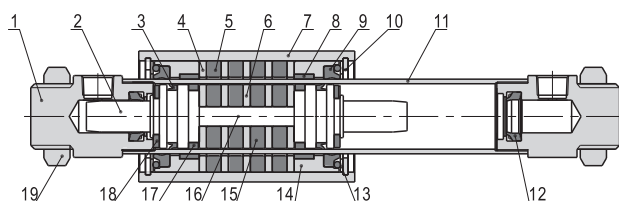


NO.	Item	Material
1	End cap	Aluminum alloy
2	Piston	Aluminum alloy
3	Piston seal	TPU
4	Magnet washer	Carbon steel
5	Magnet	Rare-earth material
6	Magnet washer	Carbon steel
7	Body	Aluminum alloy
8	Wear ring	Wear resistant material
9	Scraping dust ring	Plastics
10	C Clip	Spring steel
11	Barrel	Stainless steel
12	Cushion O-ring	TPU
13	Washer	Stainless steel
14	Cover	Aluminum alloy
15	Magnet	Rare-earth material
16	Connecting rod	Stainless steel
17	Wear ring	Wear resistant material
18	Bumper	NBR
19	Nut	Stainless steel

Dimensions

RMS、RMS-P

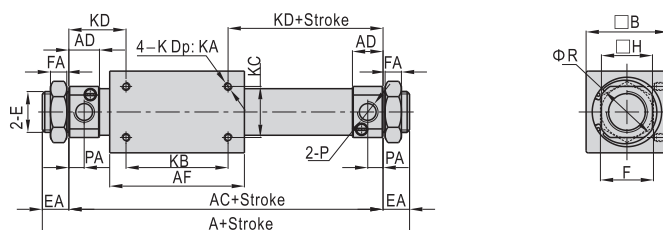

RMS-F

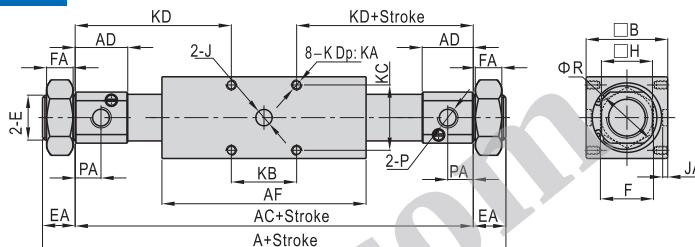

Model\Item	A	AC	AD	AF	B	E	EA	F	FA	H
RMS10	81	63	9.5	38	25	M10 × 1.0	9	14	4	15
RMS16	103	83	10	57		M10 × 1.0	10	14	4	
RMS16	112	92	14.5	57	35	M10 × 1.0	10	14	4	20
RMS16	205	181	34	80		M16 × 1.5	12	24	8	
RMS20	132	106	15	66		M20 × 1.5	13	26	8	
RMS20	143	115	19.5	66	40	M20 × 1.5	14	26	8	25
RMS20	217	185	29.5	90		M22 × 1.5	16	29	7	
RMS25	137	111	15	70		M26 × 1.5	13	32	8	
RMS25	238	206	37.5	90	46	M22 × 1.5	16	29	7	30
RMS32	156	124	16	80		M26 × 1.5		32	8	
RMS32	165	133	20.5	80	60	M26 × 1.5	16	32	8	36
RMS32	270	238	48	110		M30 × 1.5		36	7	
RMS40	182	150	22	92		M32 × 2.0	16	41	10	
RMS40	327	295	44.5	130	70	M38 × 1.5		46	8	46

Model\Item	J	JA	K	KA	KB	KC	KD	P	PA	R
RMS10	-	-	M3 × 0.5	4	30	16	16.5	M5 × 0.8	5	17
RMS16	-	-	M4 × 0.7	5	35	19	24		5.5	
RMS16	-	-	M4 × 0.7	7	34	25	29	M5 × 0.8	7.5	22
RMS16	8	3	M5 × 0.8	7.5	26	26	77.5		20	
RMS20	-	-	M4 × 0.7	5.5	50	25	28	1/8"	7.5	
RMS20	-	-	M5 × 0.8	7	40	30	37.5	1/8"	10	29
RMS20	8	2.5	M5 × 0.8	8.5	32	32	76		15	
RMS25	-	-	M5 × 0.8	7.5	50	30	30.5	1/8"	7.5	
RMS25	10	3	M6 × 1.0	10	36	36	85	1/8"	20	33.5
RMS32	-	-		8	50	40	37	1/8"	8	
RMS32	-	-	M6 × 1.0	8			41.5	1/8"	10	39.5
RMS32	10	3.5		12.5	48	48	95		28	
RMS40	-	-	M6 × 1.0	9	60	40	45	1/4"	11	
RMS40	12	4.5	M8 × 1.25	16	50	56	122	1/4"	25	49.5




RMS

Rodless magnetic cylinder

RMS Series

Ordering code of accessories

F-RMS 32 LB

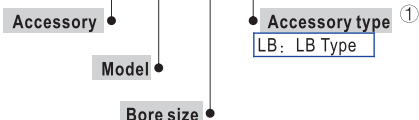


① The list accessories are for RMS cylinder. Accessories that are adaptable to other cylinder are not shown. Please refer to accessory list for selection and ordering information.

Accessory selection

Accessories\Cylinder model	RMS	RMSP	RMSF
Mounting accessories			
LB	●	●	●
FA	●	●	●

Dimensions

RMS-LB, RMSP-LB

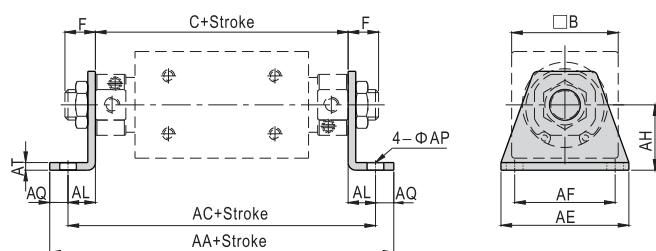


Bore size\Item	RMS	AA	RMSP	RMS	AC	RMSP	RMS	C	RMSP	RMS	F	RMSP
16	113	122	101	110	83	92	10	10				
20	158	167	142	151	106	115	13	14				
25	167	-	151	-	111	-	13	-				
32	184	193	170	179	124	133	16	16				
40	216	-	196	-	150	-	16	-				


Bore size\Item	AE	AF	AH	AL	AP	AQ	AT	B
16	42	33	20	9	5.5	6	2.5	35
20	43	30	23	18	6.5	8	3	40
25	54	40	26	20	6.5	8	4	46
32	62	46	33	23	7	7	4	60
40	75	55	38	23	9	10	5	70

RMSF-LB

Φ16~Φ25

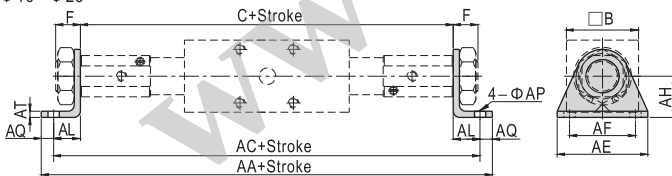


Φ32, Φ40

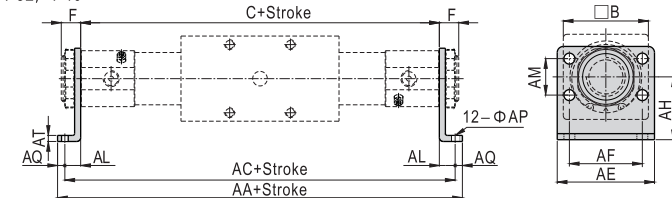


Bore size\Item	AA	AC	AE	AF	AH	AL	AM	AP	AQ	AT	B	C	F
16	221	209	44	32	20	14	-	5.5	6	2.5	35	181	12
20	235	219	54	40	23	17	-	6.5	8	3	40	185	16
25	256	240	54	40	26	17	-	6.5	8	4	46	206	16
32	280	266	66	52	33	14	28	7	7	4	60	238	16
40	353	333	80	60	38	19	30	9	10	5	70	295	16

RMS-FA, RMSP-FA

Φ16~Φ32

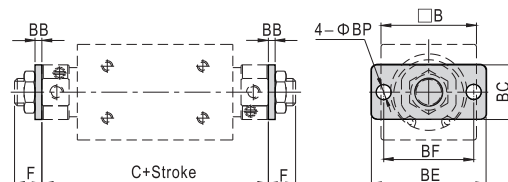


Φ40

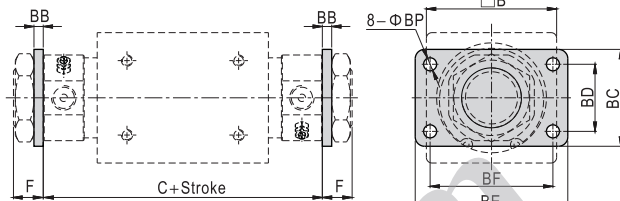


Bore size\Item	B	BB	BC	BD	BE	BF	BP	RMS	C	RMSP	RMS	F	RMSP
16	35	2.5	20	-	42	33	5.5	83	92	10	10		
20	40	4	34	-	75	60	7	106	115	13	14		
25	46	4	40	-	75	60	7	111	-	13	-		
32	60	4	40	-	75	60	7	124	133	16	16		
40	70	5	52	36	82	66	7	150	-	16	-		

RMSF-FA

Φ16~Φ25

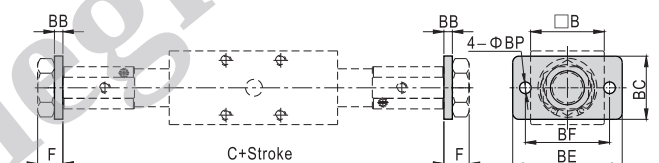

Φ32

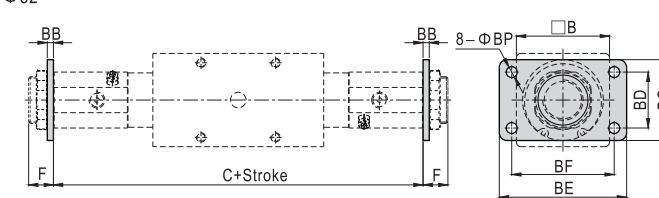

Bore size\Item	B	BB	BC	BD	BE	BF	BP	C	F
16	35	4	30	-	52	40	5.5	181	12
20	40	4	38	-	64	50	6.5	185	16
25	46	4	38	-	64	50	6.5	206	16
32	60	4	50	36	84	70	6.5	238	16

List for ordering code of accessories

Bore size\accessories	Cylinder model	Mounting accessories
	LB	FA
16	RMS RMSP RMSF	F-RMS16LB F-RMSF16LB F-MI12FA
20	RMS RMSP RMSF	F-RMS20LB F-RMSF20LB F-MA20FA F-MF25FA
25	RMS RMSP RMSF	F-RMS25LB F-RMSF25LB F-MA20FA
32	RMS RMSP RMSF	F-RMS32LB F-RMSF32LB F-MF25FA F-MA40FA
40	RMS RMSF	F-RMS40LB F-RMSF40LB F-MF40FA