

Valves / Ball Valves / Ball Valves - General Purpose (Female-Female)

CONSTRUCTIVE PROPERTIES

	STANDARD	OPTIONAL
Ball	Brass Chrome Plated	-
Handle	Steel	-
Ball Seats	PTFE (Teflon)	-
Transmission Shaft	Brass Nickel Coated	-

USAGE PROPERTIES

Conformity	TSE CEN / TS 13547	-
Max.Water Temp.	80 °C	-
Max.Pressure	25 bar	-




0920010100

Ball Valves - General Purpose (Female-Female)

www.Laheghi.com

Valves / Ball Valves / Ball Valves - General Purpose (Female-Female)

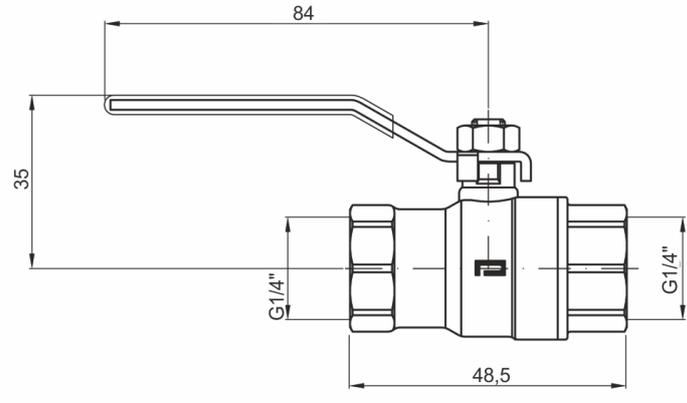


Model No: 0920010100

www.Laheghi.com

PAKKENS® VALF

Ball Valves / General Purpose

► Ball Valves

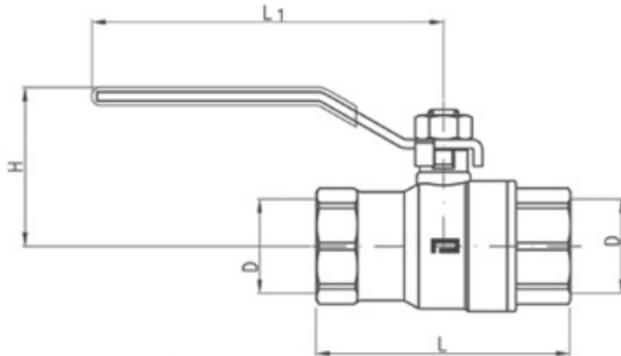

Sand Blasted

Nickel Plated

PN25

RoHS

TS

TS 3148

TS EN ISO 9001:2008

CE 0036

PG

Usage Temperature
-30°C + 80°C

Usage
F-F, Full Flow

Areas of Usage
Water, oil, inflammable gases, air ; non-acidic liquids


Nominal Pressure
PN25

Connection Sizes
DIN ISO 228/1

Optional and
NPT, BSPT

Connection Sizes

Code #	D.	L.	L1	H	Kg.
0920010100	G 1/4"	48,5	84	35	0,112
0923010100	G 3/8"	49	84	35	0,138
0926010100	G 1/2"	58	97	44	0,180
0929010100	G 3/4"	68	97	46,5	0,276
0932010100	G 1"	83	117	52	0,506
0935010100	G1 1/4"	98	117	57	0,950
0938010100	G 1 1/2"	109	155	73	1,162
0941010100	G 2"	129	155	80	1,815
0947010100	G 2 1/2"	155	230	115	3,335
0948010100	G 3"	180	230	130	4,375
0949010100	G 4"	215	230	130	7,340

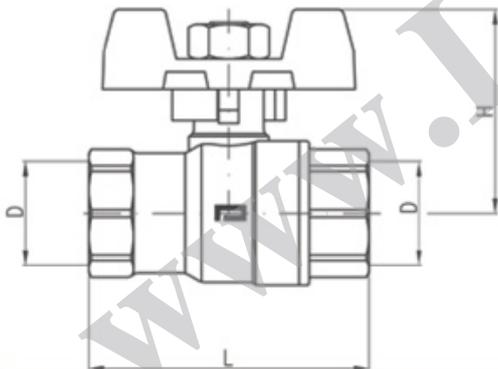

Connection Sizes

Code #		D	L	H	Kg
Red	Blue				
0920011100	0920011200	G 1/4"	48,5	35,5	0,100
0923011100	0923011200	G 3/8"	49	37	0,130
0926011100	0926011200	G 1/2"	58	41	0,156
0929011100	0929011200	G 3/4"	68	44	0,247
0932011100	0932011200	G 1"	83	52,5	0,463
0935011100	0935011200	G1 1/4"	98	58	0,910

Ball Valves